

# Circularair

## Series Air Balancing Dampers

### Features

- Manual control.
- New handle has the facility to fit an anti tamper locking screw.
- Extended bracket to suit insulated ducts.
- Common casing depth of 200mm.
- Eurovent duct sizes:  
100-355mm dia.
- Stock Item.
- Casing leakage conforms to HVCA ductwork specification DW144 Class C up to 1000 Pa.
- Damper spigots conform to BSEN1506.



*action*air

Dampers Controls Fancoils


Ruskin Air Management Limited  
[www.ruskinuk.co.uk](http://www.ruskinuk.co.uk)

## Specification

Actionair Circular Air Balancing Dampers comprise of a single 1.2 mm galvanised steel blade housed within a 0.8 mm galvanised steel casing. Complete with New Manual Control that

has the facility to fit an anti tamper locking screw. The suggested screw for this is a No. 4 (2.9mm) pan head self tapping screw 8mm long. (To be supplied by others).

## Dimensions and Weights

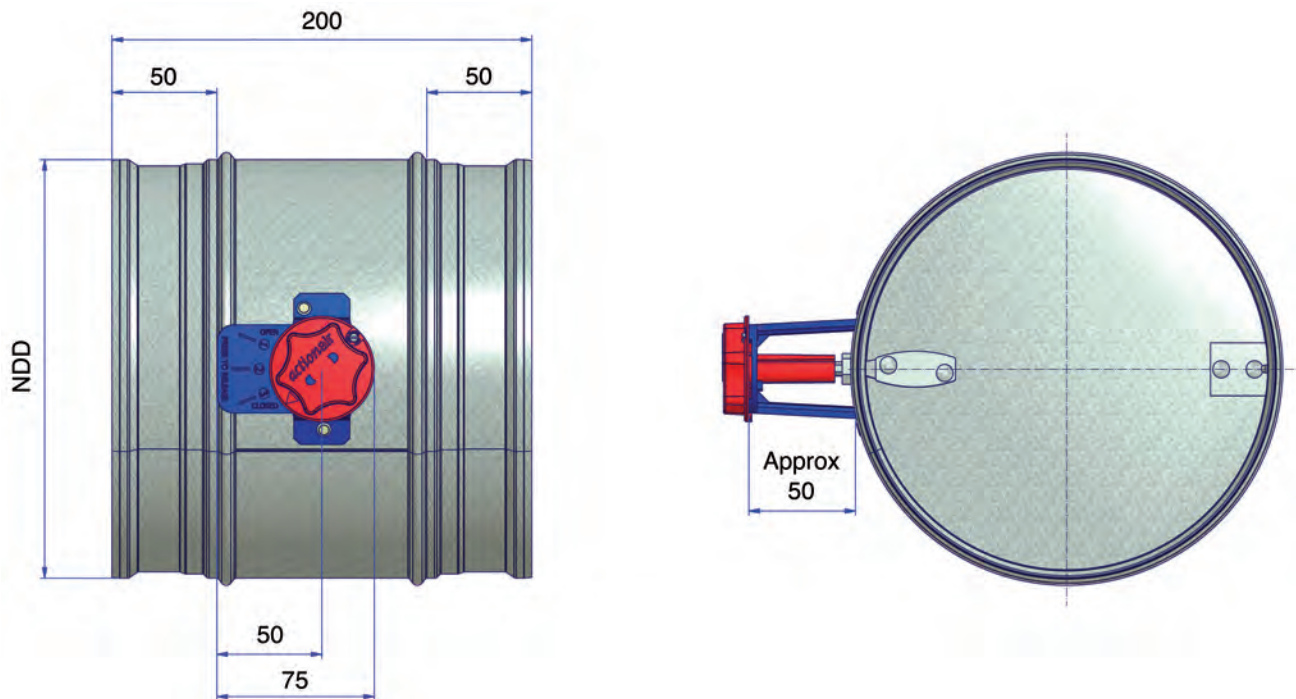

Model ref	* NDD	Open blade protrusion (mm)	DW 144 Casing leakage Class	Weight (Kg)
CB	100	-	C	0.56
CB	125	-	C	0.71
CB	150	-	C	0.85
CB	160	-	C	0.91
CB	200	-	C	1.17
CB	250	20.5	C	1.53
CB	300	45.5	C	1.92
CB	315	53	C	2.05
CB	350	70.5	C	2.35
CB	355	73	C	2.40

\* NDD: Nominal duct diameter. Actual sizes are in accordance with BS EN 1506: 1998

## Ordering Information

### Example

Quantity	Series	Type	Size
2	Circular	Balance	125mm

# Ruskin Air Management Limited

South Street, Whitstable, Kent CT5 3DU England.  
 Tel: 01227 276100 Fax: 01227 264262  
 Email: sales@actionair.co.uk Website: www.actionair.co.uk

**actionair**  
 Dampers Controls Fancoils

Ruskin Air Management Limited  
 is a ISO 9001 and 14001  
 registered company